



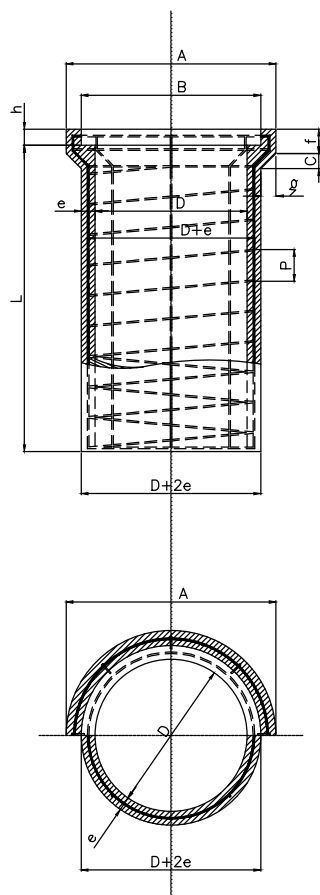


CAÑO TIPO A-82

ARMADURAS DE LAS GENERATRICES
CON LAS DIRECTRICES

ESCALA NATURAL



EXTREMO SUPERIOR DE LA GENERATRIZ



Diámetro	Espesor Pared	Largo Util	Armadura de Hierro				Peso Total de la Armadura	DIMENSIONES						Vol. de Horm.
			Espirales											
D	e	L	Longitudinales mm.	Ø (mm.)	Paso P (m)	Ø Exterior Espiral	Kg	A	B	C	f	ϕ	h	m ³
0.400	0.040	1000	(7Ø7.9) 7 Ø 8	(6.4) 6	(0.11) 0.10	0.452	7.580	0.570	0.490	0.045	0.080	0.045	0.060	0.0608
0.500	0.045	1000	(8Ø7.9) 8 Ø 8	(6.4) 6	(0.11) 0.10	0.557	8.590	0.690	0.600	0.050	0.080	0.050	0.060	0.0847
0.600	0.050	1000	(9Ø7.9) 9 Ø 8	(7.9) 8	(0.11) 0.11	0.666	14.820	0.810	0.710	0.055	0.085	0.055	0.060	0.1123
0.800	0.060	1000	(12Ø7.9) 12 Ø 8	(9.5) 10	(0.10) 0.11	0.875	27.753	1.056	0.935	0.065	0.100	0.068	0.065	0.1780
1.000	0.075	1000	(14Ø7.9) 14 Ø 8	(12.7) 12	(0.12) 0.11	1.092	46.722	1.320	1.170	0.080	0.115	0.085	0.075	0.2780

DATOS A FIJAR

HORMIGON 1:1,5 :3. POR VOLUMEN CON UN MINIMO DE 395kg. DE CEMENTO PORTLAND POR m³. DE HORMIGON.
PEDREGULLO DE 5 A 15mm. PARA CAÑOS DE 0,40 Y 0,60m DE DIAMETRO.
PEDREGULLO DE 5 A 20mm. PARA CAÑOS DE 0,80 Y 1,00m DE DIAMETRO.